

APPLICATION


NEXT ASS'Y	USED ON	VAR

REVISIONS

REV	DESCRIPTION	ECN	DATE	APP'D
B	REVISED PER ECN	9995	1/28/99	DM 2/99
C	UPDATE FOR UNIFORMITY	13113	2/21/01	DM 2/01

7797

PCB Piezotronics Inc. claims proprietary rights in the information disclosed herein. Neither the reproduction thereof will be disclosed to others without written consent of PCB Piezotronics Inc.

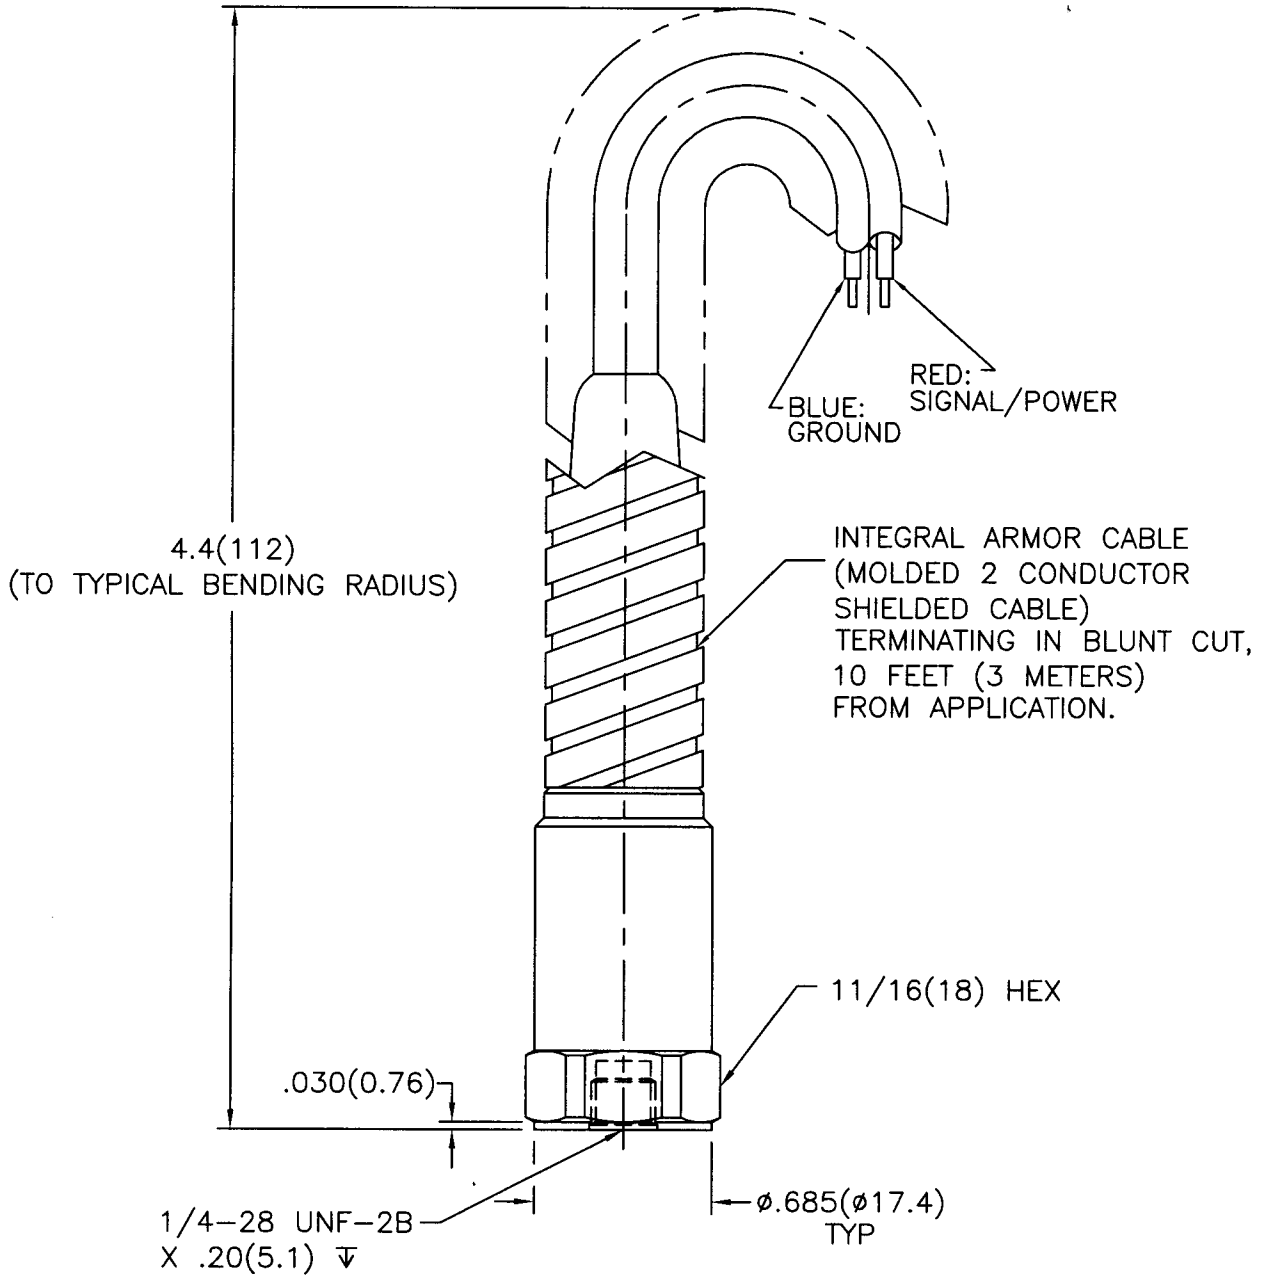

4.4(112)
(TO TYPICAL BENDING RADIUS)

RED: SIGNAL/POWER
BLUE: GROUND

INTEGRAL ARMOR CABLE
(MOLDED 2 CONDUCTOR SHIELDED CABLE)
TERMINATING IN BLUNT CUT,
10 FEET (3 METERS)
FROM APPLICATION.

11/16(18) HEX

.030(0.76)

1/4-28 UNF-2B
X .20(5.1) ▽

0.685(17.4)
TYP

UNLESS SPECIFIED TOLERANCES

DIMENSIONS IN INCHES	DIMENSIONS IN MILLIMETERS (IN PARENTHESIS)
DECIMALS XX ±.01	DECIMALS XX ±0.3
XXX ±.005	XXX ±0.13
ANGLES ±2 DEGREES	ANGLES ±2 DEGREES
FILLETS AND RADII .003 - .005	FILLETS AND RADII (0.07 - 0.13)

DRAWN	MWS	3.12.01	MFG	P.D	3/21/01
CHK'D	DM	3/16/01	ENGR	UF	3/14/01
APP'D	MZ	3/22/01	SALES	EGY	3/23/01
TITLE OUTLINE DRAWING MODELS 623C60, M, 623C61, M ACCELEROMETER					

PCB PIEZOTRONICS™
3425 WALDEN AVE. DEPEW, NY 14043
(716) 684-0001 EMAIL: SALES@PCB.COM

CODE IDENT. NO. 52681	DWG. NO. 7797
SCALE: 1.33X	
SHEET 1 OF 1	