


Performance	ENGLISH	SI	
Sensitivity(± 20 %)	1 mV/g	0.102 mV/(m/s ²)	
Measurement Range	± 5000 g pk	± 49,050 m/s ² pk	
Frequency Range(± 5 %)	1 to 5000 Hz	1 to 5000 Hz	
Frequency Range(± 10 %)	0.6 to 10,000 Hz	0.6 to 10,000 Hz	[3]
Frequency Range(± 3 dB)	0.3 to 20,000 Hz	0.3 to 20,000 Hz	[3]
Filter Type	single pole	single pole	
Electrical Filter Corner Frequency	≥ 20 kHz	≥ 20 kHz	
Resonant Frequency	≥ 50 kHz	≥ 50 kHz	
Broadband Resolution(1 to 10,000 Hz)	0.04 g rms	0.39 m/s ² rms	[1]
Non-Linearity	≤ 1 %	≤ 1 %	[4]
Transverse Sensitivity	≤ 5 %	≤ 5 %	[5]
Environmental			
Overload Limit(Shock)	± 10,000 g pk	± 98,100 m/s ² pk	
Temperature Range(Operating)	-100 to 325 °F	-73 to 163 °C	
Temperature Coefficient of Sensitivity	≤ 0.005 %/°F	≤ 0.009 %/°C	
Temperature Response	See Graph	See Graph	[1]
Base Strain Sensitivity	≤ 2 g/με	≤ 2 (m/s ²)/με	[1]
Electrical			
Excitation Voltage	19 to 30 VDC	19 to 30 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	≤ 200 Ohm	≤ 200 Ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Discharge Time Constant	0.4 to 2.2 sec	0.4 to 2.2 sec	
Settling Time(within 10% of bias)	≤ 10 sec	≤ 10 sec	
Spectral Noise(1 Hz)	7500 μg/√Hz	73,500 (μm/sec ²)/√Hz	[1]
Spectral Noise(10 Hz)	1500 μg/√Hz	14,700 (μm/sec ²)/√Hz	[1]
Spectral Noise(100 Hz)	500 μg/√Hz	4905 (μm/sec ²)/√Hz	[1]
Spectral Noise(1 kHz)	250 μg/√Hz	2450 (μm/sec ²)/√Hz	[1]
Electrical Isolation(Base)	≥ 10 ⁸ Ohm	≥ 10 ⁸ Ohm	[2][3]
Physical			
Size (Height x Length x Width)	0.23 in x 0.65 in x 0.38 in	5.84 mm x 16.4 mm x 9.6 mm	
Weight	.065 oz	1.85 gm	[1]
Sensing Element	UHT-12™	UHT-12™	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Hermetic	Hermetic	
Electrical Connector	5-44 Coaxial	5-44 Coaxial	
Electrical Connection Position	Side	Side	
Mounting	Through Hole	Through Hole	

OPTIONAL VERSIONS
Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

M - Metric Mount
Supplied Accessory : Model M039A20 Allen wrench, 1.5mm hex (1)
Supplied Accessory : Model M081B36 Insulated cap screw, M2x0.4 thd x 3/8" long (for Model M357B06) (1)

NOTES:
[1] Typical.
[2] Only when using off ground washer.
[3] When used with off ground washer, high frequency specification is typically 2 kHz less on 10% and 3 dB points.
[4] Zero-based, least-squares, straight line method.
[5] Transverse sensitivity is typically ≤ 3%.
[6] See PCB Declaration of Conformance PS022 for details.

SUPPLIED ACCESSORIES:
Model 039A20 Allen wrench, 5/64" hex (1)
Model 081B36 Insulated cap screw, 2-56 thd x 3/8" long (for Model 357B06) (1)
Model ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)

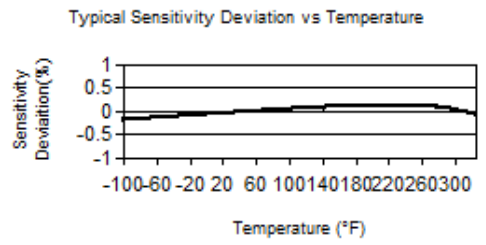

All specifications are at room temperature unless otherwise specified.
In the interest of constant product improvement, we reserve the right to change specifications without notice.
ICP® is a registered trademark of PCB Group, Inc.

Entered: LK	Engineer: GJR	Sales: JC	Approved: BAM	Spec Number:
Date: 3/30/2017	Date: 3/30/2017	Date: 3/30/2017	Date: 3/30/2017	62127

PCB PIEZOTRONICS™
3425 Walden Avenue, Depew, NY 14043

Phone: 716-684-0001
Fax: 716-684-0987
E-Mail: info@pcb.com