

Performance	ENGLISH	SI	
Measurement Range	±50 g	±490 m/s ²	
Frequency Range (±5 %)	144 to 120000 cpm	2.4 to 2000 Hz	[2]
Frequency Range (±10 %)	102 to 300000 cpm	1.7 to 5000 Hz	
Frequency Range (±3 dB)	48 to 480000 cpm	0.8 to 8000 Hz	
Resonant Frequency	1200 kcpm	20 kHz	[1]
Broadband Resolution (1 to 10000 Hz)	100 µg	981 µm/sec ²	[1]
Non-Linearity	±1 %	±1 %	[3]
Transverse Sensitivity	≤5 %	≤5 %	
Environmental			
Overload Limit (Shock)	5000 g pk	49050 m/s ² pk	
Temperature Range	-65 to +250 °F	-54 to +121 °C	
Enclosure Rating	IP68	IP68	
Electrical			
Settling Time (within 1% of bias)	≤3.0 sec	≤3.0 sec	
Discharge Time Constant	≥0.2 sec	≥0.2 sec	
Excitation Voltage	18 to 28 VDC	18 to 28 VDC	
Constant Current Excitation	2 to 20 mA	2 to 20 mA	
Output Impedance	<100 Ohm	<100 Ohm	
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC	
Spectral Noise (10 Hz)	7.0 µg/√Hz	68.7 (µm/sec ² /√Hz	[1]
Spectral Noise (100 Hz)	2.8 µg/√Hz	27.5 (µm/sec ² /√Hz	[1]
Spectral Noise (1 kHz)	1.0 µg/√Hz	9.8 (µm/sec ² /√Hz	[1]
Electrical Protection	RFI/ESD	RFI/ESD	
Electrical Isolation (Case)	>10 ⁸ Ohm	>10 ⁸ Ohm	
Physical			
Size (Length x Width x Height)	1.5 in x 1.5 in x	38.1 mm x 38.1 mm x	
	0.82 in	20.8 mm	
Weight (without cable)	4.9 oz	139 gm	
Mounting Thread	1/4-28 Male	1/4-28 Male	[4]
Mounting Torque	2 to 5 ft-lb	2.7 to 6.8 Nm	
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Stainless Steel	Stainless Steel	
Sealing	Welded Hermetic	Welded Hermetic	
Electrical Connector	Molded Integral	Molded Integral	
	Cable	Cable	
Electrical Connection Position	Side	Side	
Electrical Connections (Red)	X axis	X axis	
Electrical Connections (Green)	Y axis	Y axis	
Electrical Connections (White)	Z axis	Z axis	
Electrical Connections (Black)	Ground	Ground	
Cable Length	10 ft	3.0 m	
Cable Type	Polyurethane	Polyurethane	[5]

Optional Versions (Optional versions have identical specifications and accessories as listed for standard model except where noted below. More than one option maybe used.)

LB - Low Bias Voltage			
Output Bias Voltage	6 to 8 VDC	6 to 8 VDC	
Excitation Voltage	12 to 18 VDC	12 to 18 VDC	
Measurement Range	±35 g	±343 m/s ²	
M - Metric Mount			

- Notes**
- [1] Typical.
 - [2] The high frequency tolerance is accurate within ±10% of the specified frequency.
 - [3] Zero-based, least-squares, straight line method.
 - [4] 1/4-28 has no equivalent in S.I. units.
 - [5] Twisted shielded 4-conductor cable.
 - [6] See PCB Declaration of Conformance PS023 for details.


Supplied Accessories

081A56 Captive mounting bolt 1/4-28 x .75" ()
ICS-1 NIST-traceable single-axis amplitude response calibration from 600 cpm (10 Hz) to upper 5% frequency ()

Entered: MWS	Engineer: NJF		Spec Number:
Date: 06/03/1999	Date: 06/03/1999		8316



3425 Walden Avenue
Depew, NY 14043
UNITED STATES
Phone: 716-684-0003
Fax: 716-684-3823
E-mail: imi@pcb.com
Web site: www.imi-sensors.com

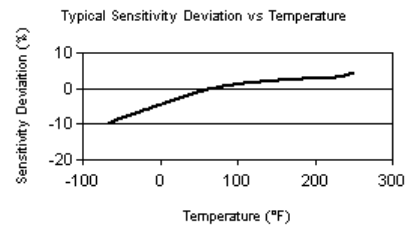

All specifications are at room temperature unless otherwise specified.

In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB group, Inc.